




Parklet module consisting of an HPC (High Performance Concrete) platform with or without an 80x20x2 mm rectangular tubular barrier with 5 steel rods $D=10$ mm or with 2 steel rods $\emptyset 10$ mm and a rectangular planter box consisting of two top-edged mantles and a 1.5 mm thick steel plate bottom.

A trapezoid-shaped 8 mm thick HPL top is fixed to the top of the barrier.


On the side opposite the barrier, two interlocking aluminium extrusions are available to compensate for the height difference of the pavement from a minimum of 100 mm to a maximum of 245 mm, or a galvanised steel ramp to compensate for the height from floor level. All metal parts are galvanised and coated with thermosetting polyester powder. All fixings are in AISI304 stainless steel. The self-supporting platform is equipped with M12 feet adjustable from above with a 6 mm hexagonal insert socket.

technical data

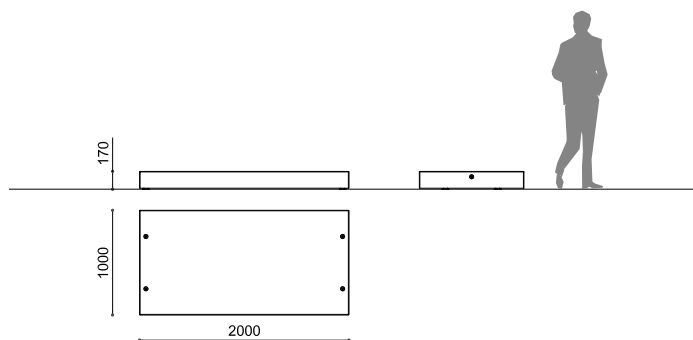

2000x1000 mm
h 170 mm

300 kg



HPC (High Performance Concrete)



Self-supporting, equipped with M12 feet adjustable from above with 6 mm hexagonal insert sleeve



Aluminium ramp for pavement
Galvanised steel ramp

