

Two-level rectangular modular bench with two opposing backrests inclined at 47° made of a 50x50x2 tubular steel frame to which the WPC slats are fixed by means of special press-folded 3 mm thick steel sheet ribs.



The seat can be used in composition with the other elements of the SUNDECKS collection.

All metal parts are galvanised.

All fixings are in AISI304 stainless steel.


The seats are prepared for installation under the floor level to a depth of 170 mm or prepared with holes Ø 12 mm for fixing to the floor with mechanical anchors (not included) for installation on a finished floor.

technical data

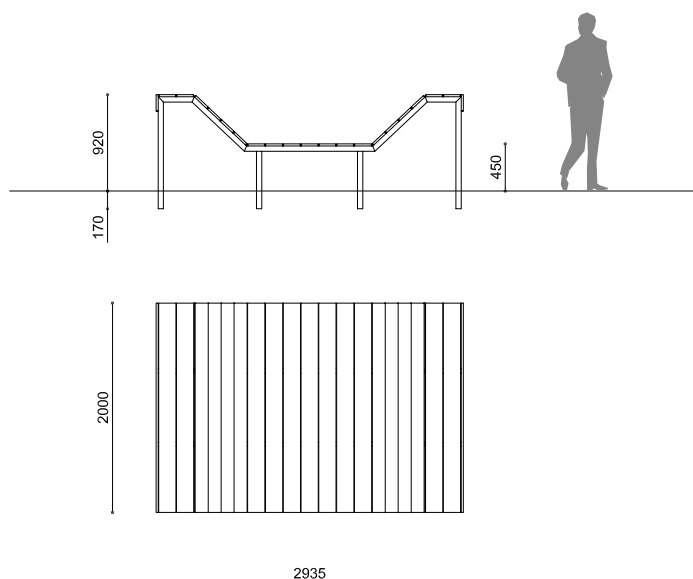

2935x2000 mm
H 920 mm (+ 170 mm) h 450 mm

300 kg



Galvanised steel
WPC



Prepared with holes Ø 12 mm for ground fixing with mechanical dowels (not included) or ingrounding under floor level at - 170 mm

