

Bench consisting of two supports in 4 mm thick steel sheet and a seat composed of eleven hardwood or thermo-treated pine slats with sections 40x40 mm and 32x130 mm on a 60x40x2 mm tubular steel frame and 4 mm thick folded steel sheet ribs.

It can be equipped with a backrest made of a 32x130 mm wooden slat and 4 mm thick steel sheet supports, with or without backrest, small steel tables or individual steel armrests.


All metal parts are galvanised and coated with thermosetting polyester powder.

The hardwood is treated with water-based pigmented impregnation, while thermo-treated pine is supplied not impregnated (impregnation available as an option).

All fixings are in AISI304 stainless steel.

Prepared with holes Ø 12 mm for ground fixing with mechanical dowels (not included).


## technical data

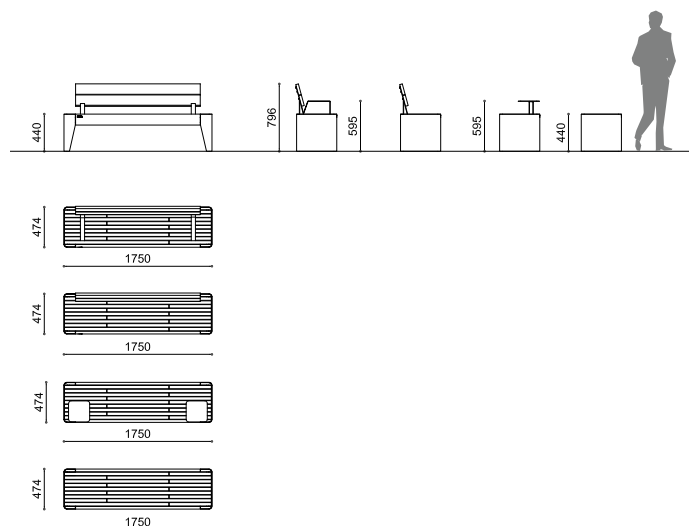

1750x474 mm  
H 796 mm h 595 mm h 400 mm



FÒLA P	W 65 kg	TW 51 kg
FÒLA P + 2B	W 68 kg	TW 54 kg
FÒLA P + 2T	W 70 kg	TW 56 kg
FÒLA S	W 75 kg	TW 61 kg
FÒLA S + 2B	W 78 kg	TW 64 kg
FÒLA S + 2T	W 80 kg	TW 66 kg



Galvanised and powder coated steel  
Hardwood  
Thermo-treated pine



Prepared with Ø 12 mm holes at the base for ground fixing with mechanical dowels (not included)



Thermo-treated pine impregnation  
Small tables  
Armrests

